




MODELS S7425-4, S7425-5, S7426-5

Alignment

Schematics, Socket, Trimmers FIRESTONE TIRE & RUBBER CO.

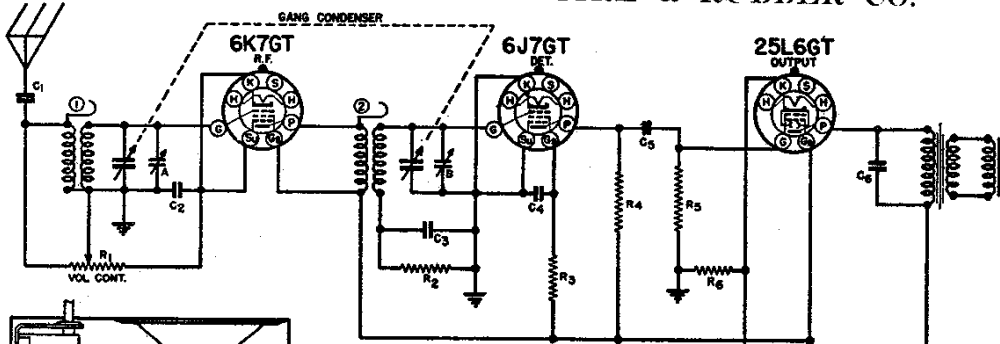


DIAG. PART NO.	DESCRIPTION	DIAG. PART NO.	DESCRIPTION
C1	C-4 .01 MFD. 400 V.	R1	V-9 25,000 OHM VOL.
C2	C-15 .05 MFD. 200 V.	R2	R-45 3.5 MEG. .25 W.
C3	C-13 .05 MFD. 200 V.	R3	R-46 6 MEG. .25 W.
C4	C-4 .01 MFD. 400 V.	R4	R-43 1 MEG. .25 W.
C5	C-4 .01 MFD. 400 V.	R5	R-42 .5 MEG. .25 W.
C6	C-4 .01 MFD. 400 V.	R6	R-105 125 OHM ±10% .5 W.
C7	C-14 .05 MFD. 400 V.	R7	R-41 30 OHM .25 W.
C8	C-14 .05 MFD. 400 V.	R8	R-18 3,000 OHM .25 W.
C9	C-233 12 MFD. 150 W.V.	R9	R-250 30 OHM 1.0 W.
C10	C-233 6 MFD. 150 W.V.	I	L-110R ANTENNA COIL
		2	L-111R R.F. COIL
		3	S-300 SPEAKER
			G-17 GANG CONDENSER



DIAG. PART NO.	DESCRIPTION	DIAG. PART NO.	DESCRIPTION
C1	C-4 .01 MFD. 400 V.	R1	V-24 25,000 OHM VOL.
C2	C-13 .05 MFD. 200 V.	R2	R-45 3.5 MEG. .5 W.
C3	C-13 .05 MFD. 200 V.	R3	R-46 6 MEG. .5 W.
C4	C-4 .01 MFD. 400 V.	R4	R-43 1 MEG. .5 W.
C5	C-4 .01 MFD. 400 V.	R5	R-42 .5 MEG. .5 W.
C6	C-4 .01 MFD. 400 V.	R6	R-105 125 OHM ±10% 1 W.
C7	C-14 .05 MFD. 400 V.	R7	R-105X 125 OHM ±10% 1 W.
C8	C-14 .05 MFD. 400 V.	R8	R-18X 3,000 OHM ±10% .5 W.
C9	C-233 12 MFD. 150 W.V.	R9	R-100 30 OHM 1 W.
C10	C-233 6 MFD. 150 W.V.	I	L-110 ANTENNA COIL
		2	L-111 R.F. COIL
			S-300A SPEAKER & TRANS.
			W-3 POWER CORD
			G-26 GANG CONDENSER

REFER TO DIAGRAM OF MODEL S-7425-4 (ABOVE)

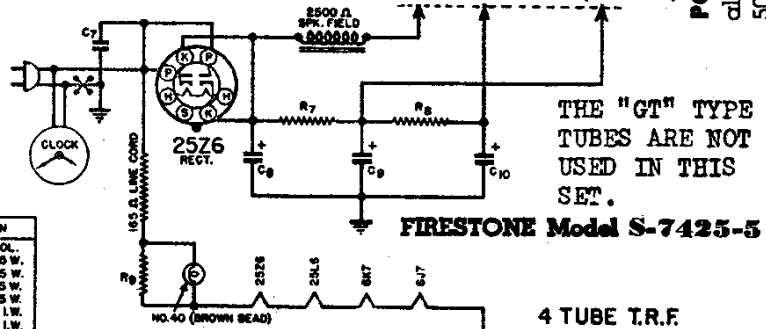


THE "GT" TYPE TUBES ARE NOT USED IN THIS SET.

FIRESTONE Model S-7425-5


The clock will keep correct time only when connected to a 60 cycle, 110 to 120 volt A.C. power supply. Never plug into a direct current circuit.

4 Tube AC Tuned Radio Frequency Receiver With Electric Clock

REFER TO DIAGRAM OF MODEL S-7425-4 (ABOVE)



DIAG. PART NO.	DESCRIPTION	DIAG. PART NO.	DESCRIPTION
C1	N-1344 .01 MFD. 400 V.	R1	V-23 25,000 OHM VOL.
C2	N-1345 .05 MFD. 200 V.	R2	N-1418 3.5 MEG. .5 W.
C3	N-1345 .05 MFD. 200 V.	R3	N-1419 6 MEG. .5 W.
C4	N-1344 .01 MFD. 400 V.	R4	N-1262 1 MEG. .5 W.
C5	N-1344 .01 MFD. 400 V.	R5	N-1264 .5 MEG. .5 W.
C6	N-1344 .01 MFD. 400 V.	R6	N-1416 125 OHM ±10% .5 W.
C7	N-1346 .05 MFD. 400 V.	R7	N-1420 125 OHM 1 W.
C8	N-1346 .05 MFD. 400 V.	R8	N-1417 3,000 OHM .5 W.
C9	C-233 12 MFD. 150 W.V.	R9	N-1415 30 OHM 1.0 W.
C10	C-233 6 MFD. 150 W.V.	R9	N-1251 25 OHM 1 W.
		I	L-110 ANTENNA COIL
		2	L-111 R.F. COIL
			G-25 GANG CONDENSER

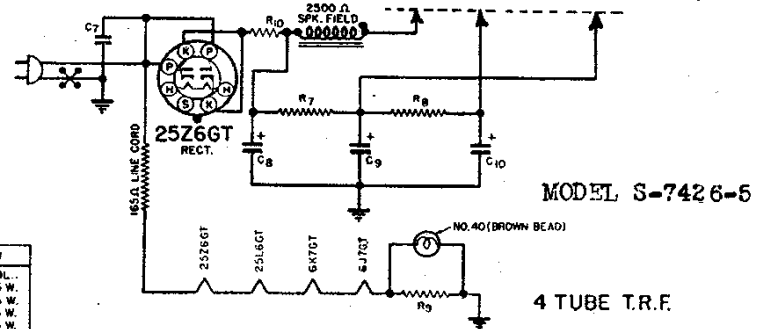

MODEL S-7426-5

POWER SUPPLY. This receiver is designed to operate on any alternating current supply (A.C.) ranging from 110 to 120 volts, 50 to 60 cycles; or on any direct current supply (D.C.) ranging from 110 to 120 volts.