


WILCOX-GAY CORP.

25-2116

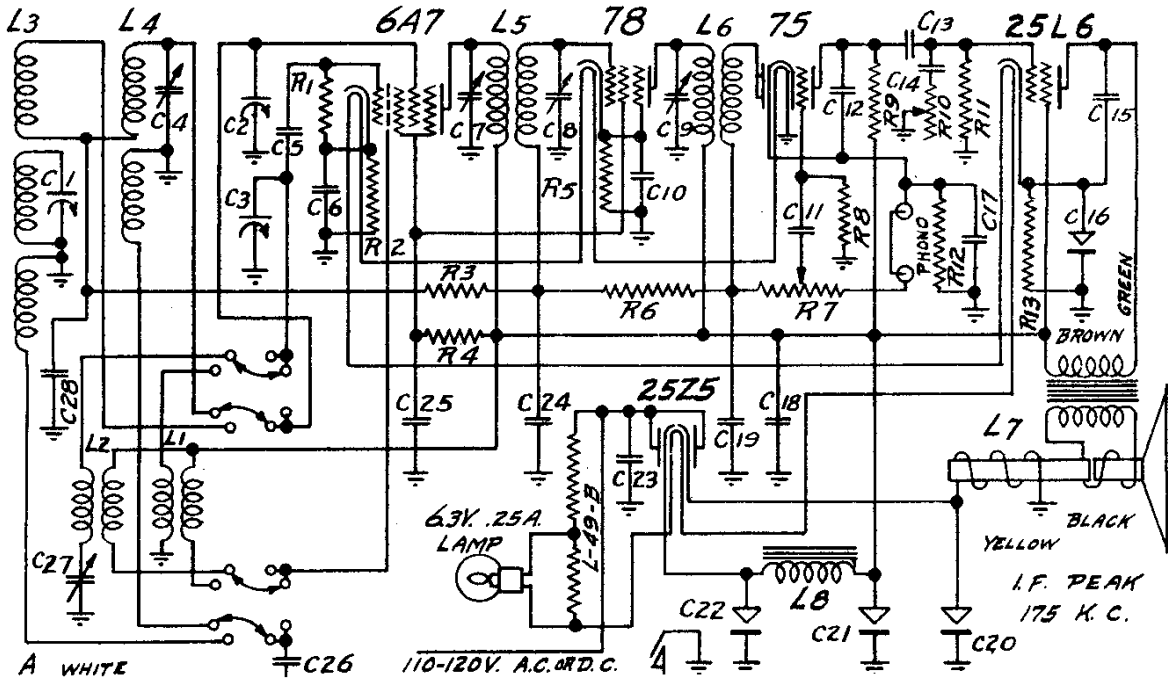


| ODE | PART NO. | RESISTORS | CODE | PART NO. | CONDENSERS (Cont.) |
|-----|----------|---|------|----------|---|
| 1 | 53-898 | 50,000 Ohm Oscillator Grid Resistor | C25 | 75-2005 | .1 Mfd. 200 V. Paper 6A7 & 78 Screen By-Pass Cond |
| 2 | 53-1062 | 250 Ohm Oscillator Cathode Resistor | C26 | 75-2003 | .01 Mfd. 400 V. Paper Antenna Series Condenser |
| 3 | 53-923 | 100,000 Ohm A.V.C. Network Resistor | C27 | 78-2006 | Long Wave Oscillator Series Condenser |
| 4 | 53-1042 | 25,000 Ohm 6A7 & 78 Screen Resistor | C28 | 75-2005 | .1 Mfd. 200 V. Grid Isolation Resistor |
| 5 | 53-1063 | 500 Ohm 78 Cathode Resistor | | | |
| 6 | 53-926 | 1 Meg Ohm A.V.C. Network Resistor | | | |
| 7 | 19-1291 | 500,000 Ohm Volume Control & Switch | | | |
| 8 | 53-925 | 500,000 Ohm 75 Grid Resistor | | | |
| 9 | 53-924 | 250,000 Ohm 75 Plate Resistor | L1 | 17-2070 | Broadcast Oscillator Coil Assembly |
| 10 | 19-1317 | 250,000 Ohm Tone Control | L2 | 17-2070 | Long Wave Oscillator Coil Assembly |
| 11 | 53-925 | 500,000 Ohm 25L6 Grid Resistor | L3 | 17-2115 | Broadcast Presetor Coil Assembly |
| 12 | 53-920 | 10,000 Ohm 75 Cathode Resistor | L4 | 17-2115 | Long Wave Presetor Coil Assembly |
| 13 | 53-2014 | 200 Ohm 25L6 Cathode Resistor | L5 | 68-2022 | First I.F. Transformer Assembly |
| | | CONDENSERS | L6 | 17-2097 | Second I.F. Transformer Assembly |
| | | | L7 | 64-2043 | 5" Speaker, 3000 Ohm Field, 25L6 Output Trans. |
| | | | L8 | 14-940 | 20 Henry Filter Choke |
| 1 | 77-833 | 16-366 MMFD. Presetor Section of 3 Gang | | | |
| 2 | 77-833 | 16-366 MMFD. Presetor Section of 3 Gang | | | |
| 3 | 77-833 | 16-366 MMFD. Oscillator Section of 3 Gang | | | |
| 4 | 78-2010 | 3-30 MMFD. Long Wave Presetor Trimmer | | | |
| 5 | 76-2002 | .00005 Mfd. Oscillator Grid Condenser | | | |
| 6 | 75-2005 | .1 Mfd. 200 V. Paper 6A7 Cathode By-Pass Cond. | | | |
| 7 | 78-993 | First I.F. Primary Trimmer | | | |
| 8 | 78-1228 | First I.F. Secondary Trimmer | | | |
| 9 | 78-788 | Second I.F. Trimmer | | | |
| 10 | 75-2005 | .1 Mfd. 200 V. Paper 78 Cathode By-Pass Cond. | | | |
| 11 | 75-2003 | .01 Mfd. 400 V. Paper Audio Feed Cond. | | | |
| 12 | 76-662 | .002 Mfd. Mica 75 Plate Filter Cond. | | | |
| 13 | 75-2003 | .01 Mfd. 400 V. Paper Audio Feed Cond. | | | |
| 14 | 75-2003 | .01 Mfd. 400 V. Paper Tone Control Cond. | | | |
| 15 | 75-2001 | .002 Mfd. 600 V. Paper 43 Plate Filter Cond. | | | |
| 16 | 18-928 | 25 Mfd. 25 V. Dry Electrolytic Condenser | | | |
| 17 | 75-2005 | .1 Mfd. 200 V. Paper 75 Cathode By-Pass Cond. | | | |
| 18 | 75-2011 | .5 Mfd. 200 V. Paper B Supply By-Pass Cond. | | | |
| 19 | 76-307 | .0005 Mfd. Mica Diode Filter Condenser | | | |
| 20 | 18-2003 | 4 Mfd. 150 W.V. Dry Electrolytic Condenser | | | |
| 21 | 18-2003 | 4 Mfd. 150 W.V. Dry Electrolytic Condenser | | | |
| 22 | 18-2003 | 11 Mfd. 150 W.V. Dry Electrolytic Condenser | | | |
| 23 | 75-2005 | .1 Mfd. 200 V. Paper Line By-Pass Condenser | | | |
| 24 | 75-2005 | .1 Mfd. 200 V. Paper A.V.C. Network By-Pass Cond. | | | |

FOR USE ONLY WITH
110-120 V . 50-60 CYCLE
OR
110-120 V. D. C.

PILOT LIGHT 6-8 V.
I. F. PEAK 115 K. C.

LOCATION OF TUBES

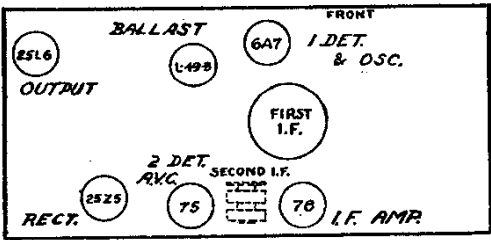

John F. Rider