


GIATE RADIO

AUTO RADIO - TRANSISTORS
DISTRIBUTEUR EXCLUSIF PYGMY

43-45, Boulevard de la Muette
95140 GARGES LES GONESSE
Tél. 993 22 11

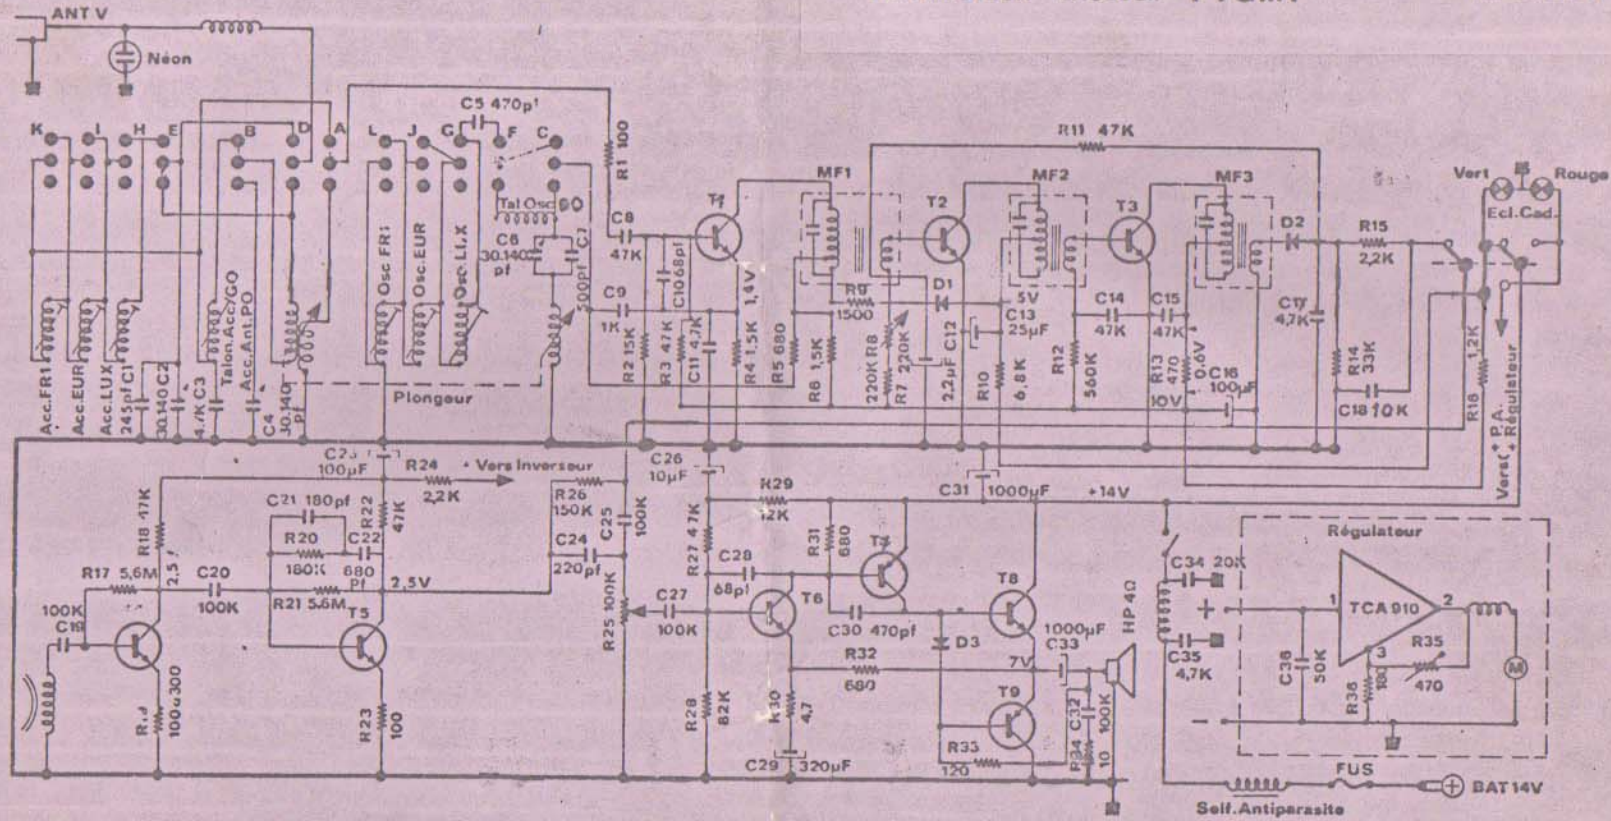


FR1	EUR	LUX	GO	PO
●●	●●	●●	●●	●●
●●	●●	●●	●●	●●
●●	●●	●●	●●	●●
LK	J I	H G	F E	D C

GAMMES COUVERTES	
PO	520kHz-1620kHz Acc.1820kHz
GO	150kHz-214kHz Acc.185,245kHz
EUR	182kHz
FR1	154kHz
LUX	253kHz

BOBINES	TRANSISTORS	DIGDES	DIVERS
YOG 949. Osc noire	T1 BF 364B/BF233 2. BF 254	D1 BA 316	Clavier M348
XAG 180. TCR incieore	T2 BF 365C/BF233 3. BF 255	D2 OF 305_OA92	Variometre VM.08.01
XAG 167. FR1 jaune	T3 BF 365D/BF233 3. BF 255	D3 64 172/173Y avec 220 en //	Potentiometre 100KO
XAG 168. LUX vert	T4 BC149C/BC109C . BC409C	ou BC 270	Fusible 2amp
XAG 169. LUX bleu	T5 BC149C/BC109C . BC409C		Néon 8017 11A
MF1 2.1E 270 bleu	T6 BC408B/BC183 B . BC108 B		HP 40
MF2 1B 271 rouge	T7 MPS 6562		Circuit intégré de régulation TCA 910
K54 11.503 F.trage1,ST	T8 AD 262		
KFPD An.en. MH	T9 BD 162		
2YO2. nt.parasite			

VMC 3

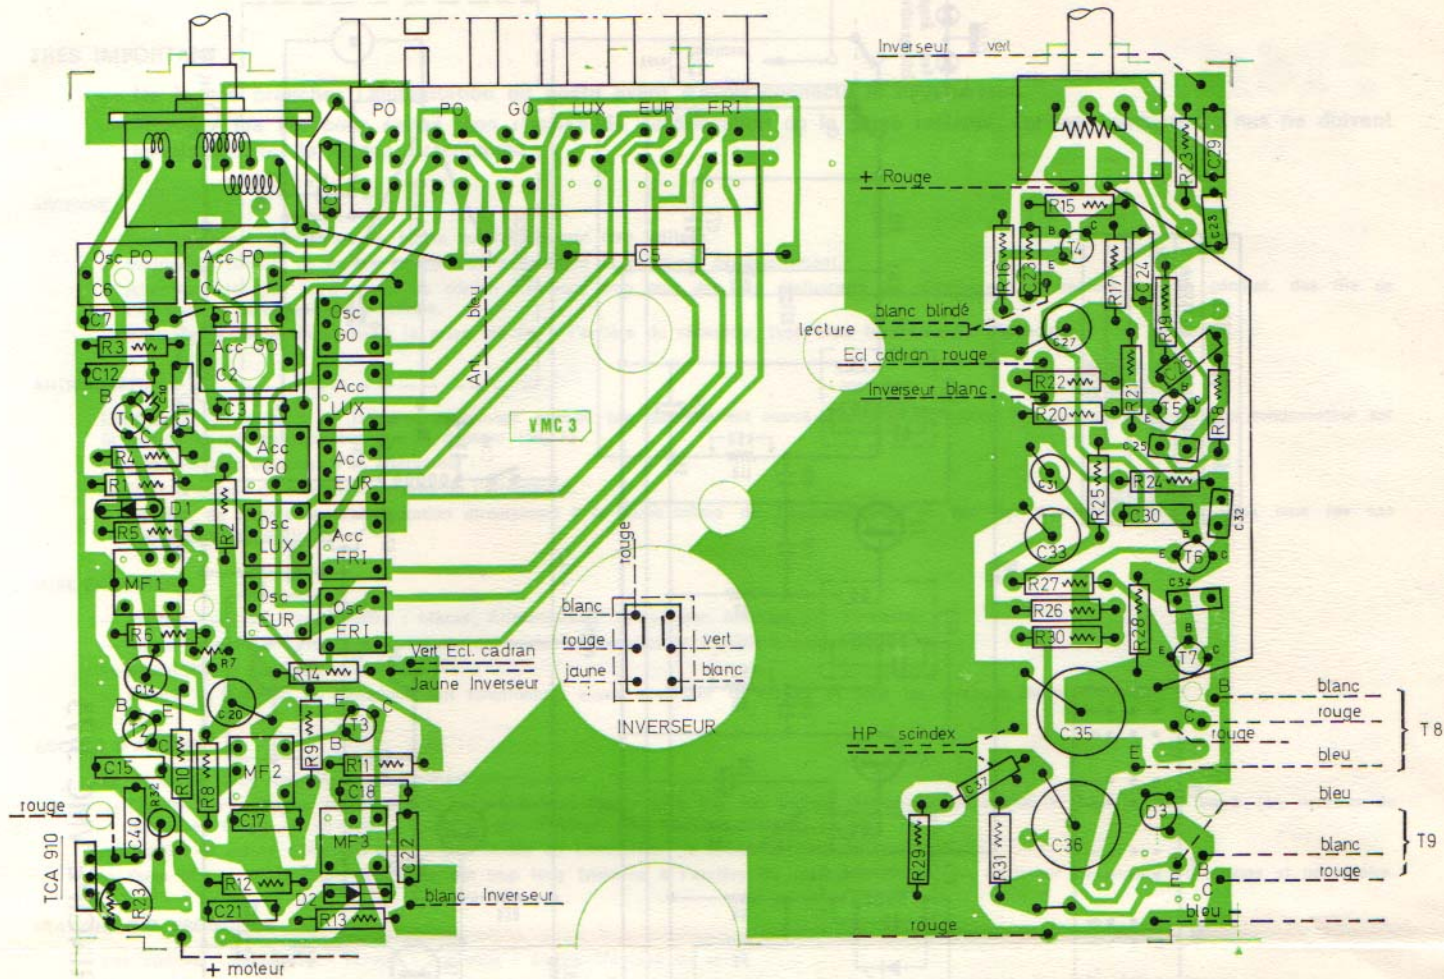

IMPLANTATION CIRCUIT IMPRIME VU COTE CUIVRE